

GPS-derived orbits for the GOCE satellite

Heike Bock · Adrian Jäggi · Ulrich Meyer ·
Pieter Visser · Jose van den IJssel · Tom van Helleputte ·
Markus Heinze · Urs Hugentobler

Received: 27 September 2010 / Accepted: 10 May 2011 / Published online: 26 May 2011
© Springer-Verlag 2011

Abstract The first ESA (European Space Agency) Earth explorer core mission GOCE (Gravity field and steady-state Ocean Circulation Explorer) was launched on 17 March 2009 into a sun-synchronous dusk–dawn orbit with an exceptionally low initial altitude of about 280 km. The onboard 12-channel dual-frequency GPS (Global Positioning System) receiver delivers 1 Hz data, which provides the basis for precise orbit determination (POD) for such a very low orbiting satellite. As part of the European GOCE Gravity Consortium the Astronomical Institute of the University of Bern and the Department of Earth Observation and Space Systems are responsible for the orbit determination of the GOCE satellite within the GOCE High-level Processing Facility. Both quick-look (rapid) and very precise orbit solutions are produced with typical latencies of 1 day and 2 weeks, respectively. This article summarizes the special characteristics of the GOCE GPS data, presents POD results for about 2 months of data, and shows that both latency and accuracy requirements are met. Satellite Laser Ranging validation shows that an accuracy of 4 and 7 cm is achieved for the reduced-dynamic and kinematic Rapid Science Orbit solutions, respectively. The validation of the reduced-dynamic and kinematic Precise Science Orbit solutions is at a level of about 2 cm.

H. Bock (✉) · A. Jäggi · U. Meyer
Astronomical Institute of the University of Bern, Sidlerstrasse 5,
3012 Bern, Switzerland
e-mail: heike.bock@aiub.unibe.ch

P. Visser · J. van den IJssel · T. van Helleputte
Department of Earth Observation and Space Systems,
Delft University of Technology, Kluyverweg 1, 2629 HS Delft,
The Netherlands

M. Heinze · U. Hugentobler
Institut für Astronomische und Physikalische Geodäsie,
Technische Universität München, Arcisstraße 21, 80333 Munich,
Germany

Keywords GOCE · GPS · Precise orbit determination · SLR validation

1 Introduction

The Gravity field and steady-state Ocean Circulation Explorer (GOCE, [Drinkwater et al. 2006](#)) is the first Earth explorer core mission of the European Space Agency (ESA). It was launched on 17 March 2009 from Plesetsk, Russia. The core instrument is a three-axis gradiometer for determining the gravity field with an unprecedented accuracy of 1 mGal and the geoid with an accuracy of 1 cm, both at a spatial resolution of 100 km ([Rummel et al. 2002](#)). In addition, the mission is equipped with two 12-channel dual-frequency Lagrange ([Intelisano et al. 2008](#)) GPS (Global Positioning System) SSTIs (satellite-to-satellite tracking instruments) consisting of an independent receiver and antenna each. The main unit (SSTI-A) is running in nominal operations, whereas the other one serves as a redundant unit (SSTI-B). The results discussed subsequently were all obtained from 1 Hz data of the SSTI-A in the time interval from 31 October 2009 until 10 January 2010 (72 days).

The satellite's low altitude (259.6 km, mean distance from the geocenter minus the Earth radius at the equator or 254.9 km, mean semi-major axis minus the Earth radius at the equator) is necessary to be highly sensitive to the Earth's gravity field. This low orbital altitude can only be maintained with a drag-free flight realized by the drag-free and attitude control system (DFACS). Drag-free flight means for GOCE that the non-gravitational forces acting on the satellite in flight direction (mainly atmospheric drag) are compensated by an IPA (ion propulsion assembly). Figure 1 illustrates the drag-free mode by means of empirical accelerations (constrained 6 min piece-wise constant) in the along-track

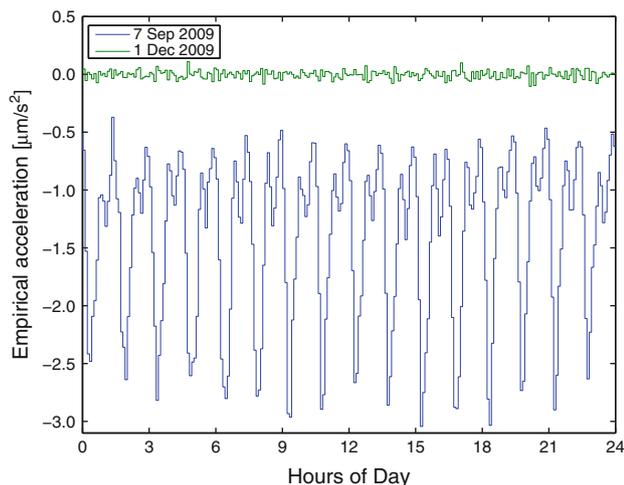


Fig. 1 Empirical along-track accelerations for 2 days; 7 September 2009: descent phase without drag compensation; 1 December 2009: drag-free mode

direction estimated from a reduced-dynamic (RD) orbit determination for 2 days. On 7 September 2009, the satellite was still in its descent phase (Jäggi et al. 2010) to the measurement altitude and the drag-free mode was not activated on this day. On 1 December 2009, however, the IPA was activated for the drag-free flight. The differences in the estimated accelerations are obvious. The figure also illustrates how well the DFACS works. Not only the mean along-track acceleration is compensated, but also the variations are significantly reduced. The drag-free flight implies that it is not necessary to use models for the atmospheric drag in the RD orbit determination (see Sect. 4.1).

Precise orbit determination (POD) for the GOCE satellite is one task of the GOCE High-level Processing Facility (HPF, Koop et al. 2006). A low latency orbit product, the so-called Rapid Science Orbit (RSO), is produced under the responsibility of the Department of Earth Observation and Space Systems (DEOS), Delft University of Technology, The Netherlands. The requirement is a latency of 1 day after availability of GOCE data, and an accuracy of 0.5 m (3D, Visser et al. 2006). The Precise Science Orbit (PSO) is produced at the Astronomical Institute of the University of Bern (AIUB), Switzerland. The requirement in latency is 2 weeks with an accuracy of 2 cm (1D, Visser et al. 2006). The two institutions have proven their ability for LEO POD in, e.g., Jäggi et al. (2007, 2009); van den IJssel et al. (2003); Montenbruck et al. (2005, 2008) and have shown in Bock et al. (2007) and Visser et al. (2009) that the POD requirements for the GOCE mission can be met with their procedures.

General GOCE GPS data processing information is provided in Sect. 2, typical characteristics of the GOCE GPS data

are described in Sect. 3, and first GOCE orbit results for the 72-day period are presented in Sect. 4. Section 5 addresses the orbit validation with independent Satellite Laser Ranging (SLR) measurements and Sect. 6 summarizes the results.

2 General information about GOCE GPS data processing

The estimated GOCE orbits refer to the center of mass (CoM) of the satellite, which requires precise knowledge of the offsets of the corresponding antenna with respect to this CoM and of the attitude of the satellite. Detailed information about all antenna offsets may be found in Bigazzi and Frommknecht (2010). A short summary of this information is provided in this article. Figure 2 shows a schematic view of the GOCE satellite with the locations of the SSTI-A and SSTI-B antennas, the laser retro reflector (LRR) and the definition of the right-handed satellite reference frame (SRF). Due to fuel consumption, the CoM will be slightly moving during the lifetime of the satellite. Table 1 gives the coordinates of the CoM in the SRF for the time interval considered here. Table 2 lists the coordinates for the center of the mounting plane (CMP) of the SSTI-A antenna in the SRF.

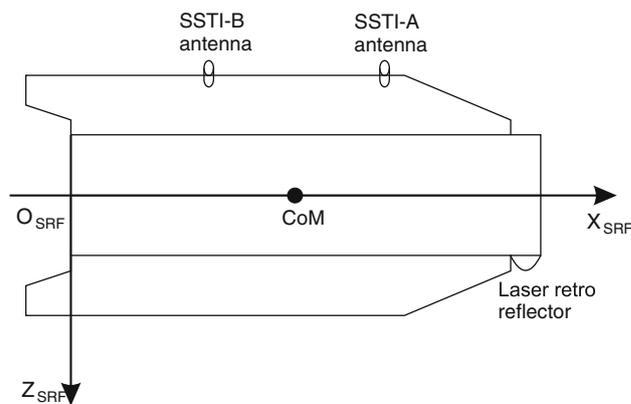


Fig. 2 Schematic view on SSTI antennas and LRR on GOCE

Table 1 Excerpt of the time series for the CoM coordinates in SRF

Date	X_{SRF} (m)	Y_{SRF} (m)	Z_{SRF} (m)
18 May to 29 November 2009	2.5000	0.0036	0.0011
30 November 2009 to 10 January 2010	2.5010	0.0036	0.0011

Table 2 Coordinates of CMP of SSTI-A antenna in SRF

	X_{SRF} (m)	Y_{SRF} (m)	Z_{SRF} (m)
SSTI-A	3.1930	0.0000	-1.0922

Table 3 SSTI-A antenna PCOs in ARF

Frequency	X_{ARF} (mm)	Y_{ARF} (mm)	Z_{ARF} (mm)
L1	-0.18	3.51	-81.11
L2	-1.22	-1.00	-84.18

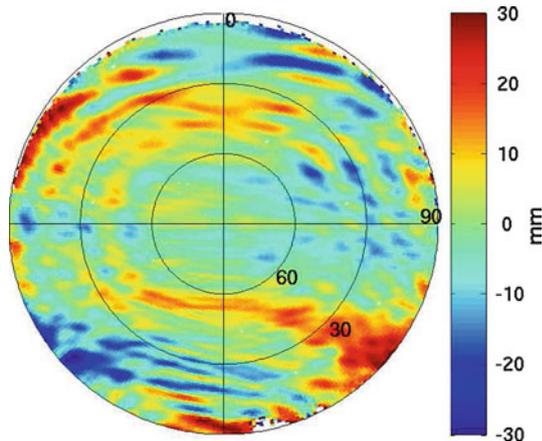


Fig. 3 Azimuth-elevation diagram of the $1^\circ \times 1^\circ$ PCVs (mm) for the ionosphere-free linear combination of the GOCE SSTI-A antenna; antenna-fixed system, azimuth of 0° nominally points into flight direction

Jäggi et al. (2009) showed that neglected or mismodeled antenna phase center offsets (PCOs) and variations (PCVs) are important systematic error sources in GPS data processing of LEO satellites. Table 3 summarizes the PCO values for the two GPS frequencies in the antenna reference frame (ARF). The axes of the ARF used here are parallel to those of the SRF, but with the origin in the CMP of the SSTI-A antenna. Figure 3 shows the $1^\circ \times 1^\circ$ PCVs of the GOCE SSTI-A antenna for the ionosphere-free linear combination of the two GPS frequencies in an azimuth-elevation diagram. The azimuth angle of 0° coincides with the x -direction of the ARF/SRF and nominally points into flight direction. The PCVs are the result of an in-flight calibration performed with the so-called residual approach (Jäggi et al. 2009). Carrier phase residuals of the ionosphere-free linear combination from 154 days within April to September 2009 from the RD PSO orbit determination have been used for this purpose. For a more detailed description we refer to Bock et al. (2011). The SSTI-A antenna PCVs are consequently used in the PSO procedure (see Sect. 4.2). The corresponding numerical values of the PCVs (in ANTEX format, Rothacher and Schmid 2010) as well as the entire time series of the CoM coordinates (listed with one digit less than in Table 1 or Bigazzi and Frommknecht (2010)) can be found at <http://earth.esa.int/GOCE/>.

3 GOCE GPS data characteristics

For the first time, 1 Hz GPS data on 12 channels are available for POD of a gravity field mission. The officially available data sets for both CHAMP (Reigber et al. 2002) and GRACE (Tapley et al. 2004) only provide 0.1 Hz on a maximum of ten channels (see, e.g., Bock 2004). Thanks to the larger number of tracked satellites, more observations are available per epoch, which is very helpful, in particular for the kinematic (KIN) positioning of the GOCE satellite.

Figure 4a shows the number of dual-frequency observations per epoch and Fig. 4b the corresponding percentages for a typical day (6 November 2009) extracted from the corresponding RINEX (Gurtner 1994) file. Ten or more observations per epoch are available for about two-thirds of the epochs. In addition, the GOCE GPS data are hardly affected by data gaps. Only five observation epochs are missing during the entire 72-day period. Before data screening, fewer than 2% of the epochs do not have enough (i.e., <5) observations to provide a reliable KIN position estimate.

Time tagging of the observations is a special characteristic of the GOCE GPS data. In principle, the observations are sampled at a 1 Hz rate, but the internal clock is not steered to integer seconds and the observation epochs have, therefore, fractional offsets. Figure 5a shows these fractional offsets for the midnight epochs of the 72-day period. The fractional offset stays constant for about 25–27 h and then jumps by 20 ms (Fig. 5b). The offset had moved by 1 s after 60 days.

These non-steered observation epochs cause no problem in a precise point positioning (PPP, Zumberge et al. 1997) mode, provided the GPS orbit and clock information is calculated at the correct time tags. If the GOCE observations are, however, used together with other observations, e.g., GPS ground tracking data for double- or triple-difference processing, a method has to be found to synchronize the observations (see Sect. 4.1). The resulting KIN positions from both the RSO and the PSO product are not truly equidistant due to the free running clock. This has to be taken into account when using these KIN positions for further processing, e.g., for gravity field recovery (Jäggi et al. 2011).

4 Orbit generation and results

4.1 Low latency orbits: RSO

An RSO chain (Visser et al. 2009; Bock et al. 2007) was implemented for the GOCE satellite to support mission operations. These orbits are used amongst others for external calibration, geodetic preprocessing of the gradiometer data and for quick-look gravity field modeling. The RSO chain provides two orbit types, an RD and a KIN orbit. In addition, the RSO product contains the observation residuals of both

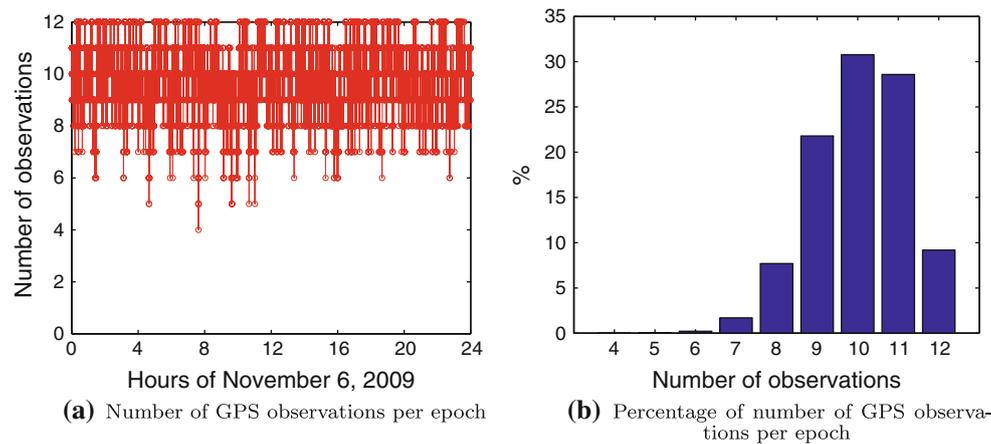


Fig. 4 GOCE GPS dual-frequency observations on 6 November 2009 from RINEX file

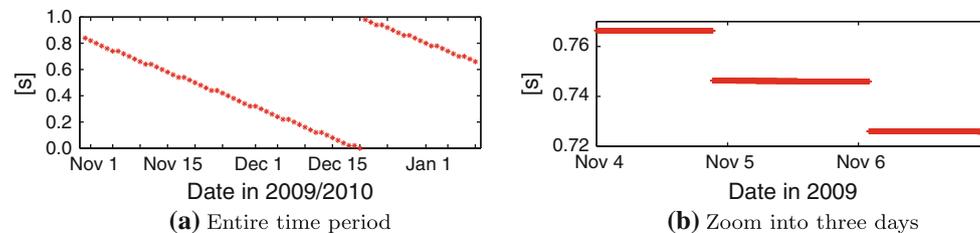


Fig. 5 Fractional offsets of GOCE GPS observation epochs at midnight

orbits, quaternion information describing the rotation of the Earth centered fixed orbit to the Earth centered inertial frame, as well as a quality report with information about the accuracy of both orbits. A summary of the dynamical and measurement models used for the orbit determination is listed in Table 4.

The processing strategy used to obtain the RD RSO is largely based on existing POD infrastructure used at DEOS for CHAMP and GRACE, which is described in detail in van den IJssel et al. (2003). The core of this infrastructure is the GEODYN software, kindly provided by the NASA Goddard Space Flight Center (Pavlis et al. 2006). The POD strategy is based on a triple-difference approach and uses ionospheric-free GPS phase observations along with rapid GPS orbits computed by the International GNSS Service (IGS, Dow et al. 2009). The orbits are computed using 30 h batches, with 6 h overlaps between subsequent orbits. The resulting RSO, however, is cut to daily 24 h solutions and contains position and velocity information with a 10 s sampling. Due to the fractional offsets of the GOCE GPS observations to the integer second (see Sect. 3), a simple splines interpolation is used to interpolate the GPS phase observations to integer seconds. The resulting 1 Hz data is down-sampled to 30 s, which is

the data rate of the ground station network used in the triple-differencing scheme. This network consists of 35 more or less homogeneously distributed IGS ground stations. Due to the drag-free flight of the GOCE satellite, no a priori non-gravitational force models are applied; 15 min piecewise constant empirical accelerations are estimated in three orbital directions instead to account for DFACS residuals and remaining model errors. Due to latency requirements, no use is made of the gradiometer common-mode accelerations.

The KIN orbit is computed using the GHOST software, which was developed at the Deutsches Zentrum für Luft- und Raumfahrt in close cooperation with DEOS (van Helleputte 2004). The POD strategy is based on an undifferenced approach, using rapid GPS orbits and 30 s clock corrections computed by the Center for Orbit Determination in Europe (CODE, Dach et al. 2009). This approach was already successfully used for POD of, e.g., MetOp-A (Montenbruck et al. 2008). The KIN orbit processing is done in 24 h batches and the resulting orbit consists of position information only, with a 1 s sampling. Both the RD and the KIN RSO use attitude information from the star tracker quaternions. Figure 6 shows the deviations between the actual and the nominal roll- and yaw axes for an example day. The deviations for the pitch

Table 4 Summary of dynamical and measurement models employed for the orbit determination of GOCE

Item	GEODYN (RD RSO)	GHOST (KIN RSO)	Bernese GPS Software (RD and KIN PSO)
GPS measurement model	Triple differenced ionosphere-free phase igs05.atx ^a GOCE PCOs IGS rapid GPS ephemerides 30 h arc length Elevation cut-off 0° (10° for ground stations) 10 s sampling Tropospheric refraction scale bias per ground station per 30 h arc using Niell ^c GPS mapping functions	Undifferenced ionosphere-free phase igs05.atx GOCE PCOs CODE rapid GPS ephemerides and 30 s clocks 24 h arc length Elevation cut-off 0° 1 s sampling	Undifferenced ionosphere-free phase igs05.atx GOCE PCOs + PCVs CODE final GPS ephemerides and 5 s clocks ^b 30 h arc length Elevation cut-off 0° 10 s/1 s (RD/KIN) sampling
Gravitational forces	EIGEN-5S ^d (150 × 150) Solid Earth, pole and ocean tides (IERS2003 ^e , FES2004 ^f) Luni-solar-planetary gravity (DE405 ^g)	N/A for KIN RSO	EIGEN-5S (120 × 120) Solid Earth, pole and ocean tides (IERS2003, FES2004) Luni-solar-planetary gravity (DE405) N/A for KIN PSO
Non-gravitational forces	No drag and radiation force model Empirical constant RTN ^h -accelerations at 15 min intervals, constraints: along-track, cross-track 40 μm/s ² , radial 40 nm/s ²	N/A for KIN RSO	No drag and radiation force model Empirical constant RTN-accelerations per 30 h arc; RTN-accelerations at 6 min intervals, constraints: 20 nm/s ²
Reference frame	ITRF2005 ⁱ /IGS05 IERS2003 reference frame transformations IGS rapid ERPs GOCE star tracker quaternions for attitude	ITRF2005/IGS05 N/A for KIN RSO CODE rapid ERPs GOCE star tracker quaternions for attitude	ITRF2005/IGS05 IERS2003 reference frame transformations CODE final ERPs GOCE star tracker quaternions for attitude
Estimation	Batch least squares	Batch least squares	Batch least squares

^a Schmid et al. (2007)^b Bock et al. (2009)^c Niell (1996)^d Förste et al. (2008)^e McCarthy and Petit (2004)^f Lyard et al. (2006)^g Standish (1998)^h Radial, tangential, normalⁱ Altamimi et al. (2007)

axis are not shown, because they are similar to those of the roll axis. The attitude of the GOCE satellite is controlled by magneto-torquers only. The satellite is piloted in yaw-steering mode, which allows the yaw angle (deviations of pitch and roll axes from nominal) to accumulate up to 6° at the

equator. These variations are larger than for CHAMP and GRACE, which show variations of 2 and 1°, respectively.

During the 72-day period considered in this article, PCV maps have not been applied in the RSO processing, since this was not required for meeting the 50 cm 3D accuracy require-

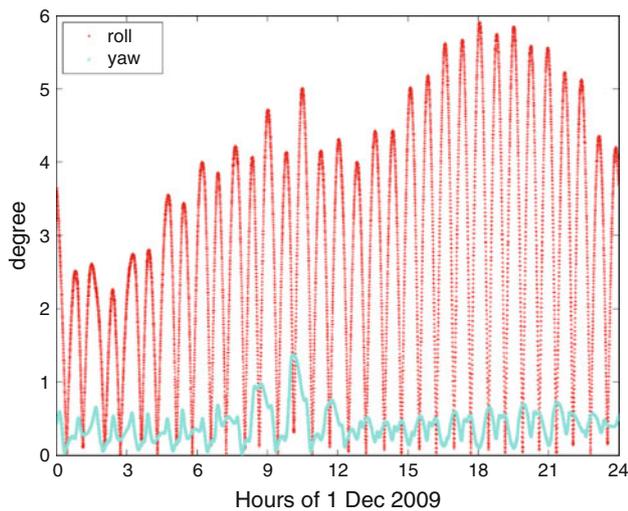


Fig. 6 Absolute deviations between the actual and nominal roll- and yaw axes of the GOCE satellite for 1 December 2009

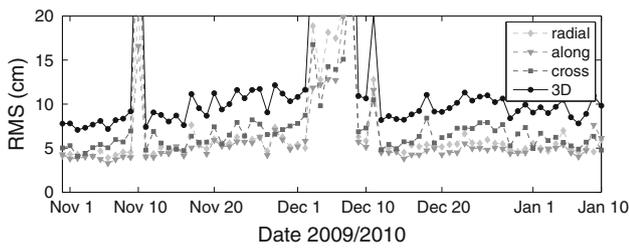


Fig. 7 RMS values (cm) in radial, along-track, cross-track and 3D for differences between RD and KIN RSO; 31 October 2009 to 10 January 2010; mean offsets: radial 1.44, along-track -0.35 , cross-track -3.96 cm

ment. All processing standards are summarized in the GOCE Standards document (ESA 2010b).

Figure 7 shows the comparison between the RD and the KIN RSO. In general, the internal consistency is around 10 cm (3D). The largest differences occur in cross-track direction, due to the large effects of the PCVs (Fig. 3) in this direction (see also, Bock et al. 2011). A big outlier is visible from 3 to 8 December 2009, with orbit differences of up to 47 cm. Around this time, the CODE rapid clock corrections were not available (Dach 2009), instead rapid IGS clock corrections were used in the KIN RSO processing. Due to the reduced 5 min sampling of the IGS rapid clock product compared to the 30 s sampling of the rapid CODE clock corrections, the accuracy of the KIN solutions is greatly affected by the required interpolation, especially in the radial direction. Other outliers are due to occasional sub-optimal data editing of the KIN orbits.

Figure 8 gives an overview of the RSO product latency for the entire 72-day period. For most days, the RSO product is available around 12 h after the availability of the GOCE data,

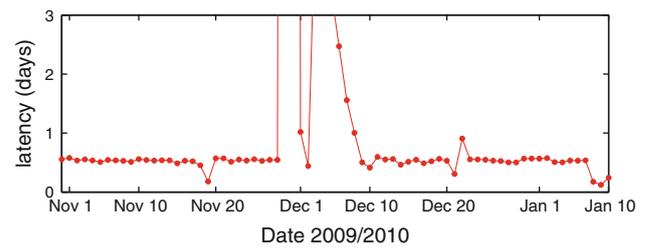


Fig. 8 RSO product latency for the 72-day period

which means that the RSO easily meets the latency requirement of 1 day after data availability. Again, a big outlier is visible from 3 to 8 December 2009, showing that it took a few days to change the KIN processing temporarily to use rapid IGS clock corrections instead of CODE rapid clock corrections. In general, the latency is largely determined by the waiting time for the auxiliary GPS data, and the actual RSO computation time is approximately 2 h on a standard linux PC. Other outliers are usually due to non-nominal deliveries of the GOCE data, with a maximum 3 days of waiting time for missing GOCE data. Periods of relatively short latencies visible around 19 November and 10 January are due to late deliveries of the GOCE data, where the latency is no longer determined by the availability of the auxiliary GPS data.

4.2 Post-processed orbits: PSO

The GOCE PSO (Bock et al. 2007; Visser et al. 2009) is used for the final Level 2 processing within the HPF. The orbits are primarily used to accurately geolocate the gravity gradients and to recover the long wavelength part of the Earth's gravity field (Pail et al. 2011).

The GOCE orbit determination procedure at AIUB (Bock et al. 2007) is based on undifferenced processing of the GPS observations and uses the so-called PPP method. The processing is done with a tailored HPF version of the Bernese GPS Software (Dach et al. 2007). Table 4 lists the dynamical and measurement models used for the orbit determination. The entire processing standards are summarized in the GOCE Standards document (ESA 2010b) and a description of the contents of the orbit product can also be found in the GOCE Level 2 Product Data Handbook (ESA 2010a). The two orbit types, RD and KIN, are results of one processing run. The data screening is done only once and the same observations (except for the sampling) are used for both solutions.

The method to generate RD orbits for LEOs with the Bernese GPS Software has already been successfully used for POD for several LEOs, e.g., CHAMP (Jäggi et al. 2006), GRACE (Jäggi et al. 2007), TerraSAR-X (Jäggi et al. 2009), and MetOp-A (Montenbruck et al. 2008) and is described in

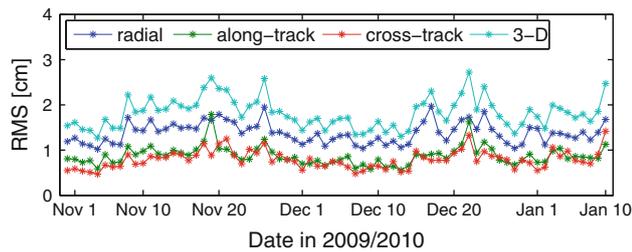


Fig. 9 RMS values (cm) in radial, along-track, cross-track and 3D for differences between RD and KIN PSO; 31 October 2009 to 10 January 2010

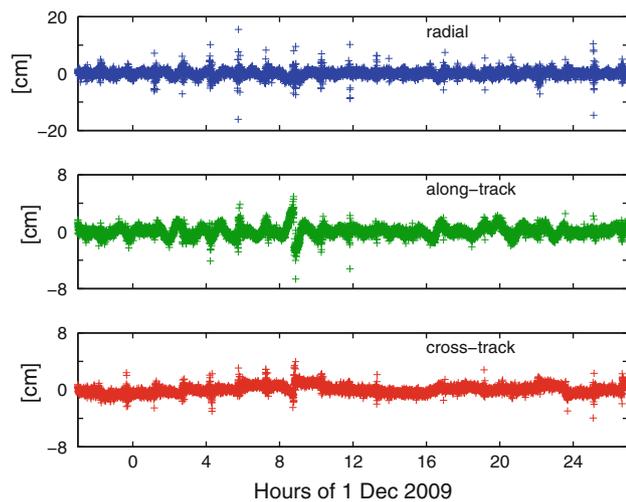


Fig. 10 Example for differences in radial, along-track and cross-track direction between RD and KIN PSO; 1 December 2009

detail in Jäggi et al. (2006). KIN orbits (Švehla and Rothacher 2005) have also already successfully been generated with the Bernese GPS Software and have been used for gravity field recovery (see, e.g., Gerlach et al. 2003; Prange et al. 2010). A band-limited part (± 4 epochs) of the full covariance matrix of KIN positions is derived in the course of the KIN orbit determination.

The orbit processing is performed in 30 h batches leading to 6 h overlaps between subsequent days. For the final PSO, however, the orbits are cut to the central 24 h. KIN positions are only provided for the final product if five or more simultaneous GPS observations are available after data screening. This leads on average to 0.5% of missing KIN positions, implying that the time series of the KIN positions are almost continuous.

The processing time for the PSO is about 3 h on a standard linux PC. Under normal conditions of data availability, the PSO product is delivered 7–10 days after data collection on the satellite.

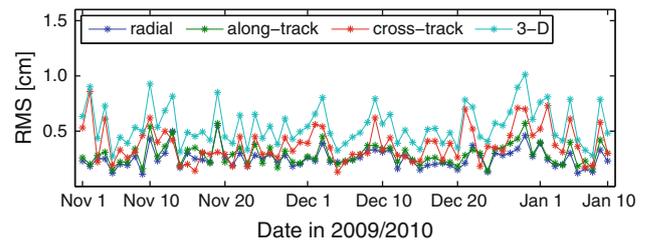


Fig. 11 RMS values (cm) for 5 h overlaps of RD PSO solutions

Figure 9 shows the RMS values for the differences between RD and KIN orbits for the 72-day period. The differences are evaluated every 10 s (by propagating the RD to the observation epochs of the KIN positions) and epochs with orbit differences larger than 1 m are neglected for this statistic. The number of neglected epochs is 60 for the entire time period. If these epochs would be consecutive, this would correspond to a maximum of 10 min (60×10 s) of probably erroneous KIN positions. This is a very small number compared to the length of the considered time period. The mean of the 3D RMS values is 1.82 cm, which confirms an excellent consistency between RD and KIN orbits. No significant offsets were detected between the two orbit types. Figure 10 shows typical orbit differences. Small jumps in the kinematic orbits may occur, e.g., at about 08:30 hours. This may happen after a short data gap leading to a new initialization of all phase ambiguities. Note that the comparison between RD and KIN orbits does not give information about the orbit accuracy. The comparison, however, shows that the data quality is very good for the entire data period, because KIN positioning is very sensitive to data problems.

The analysis of the overlaps of subsequent orbits provides another internal quality check. Thanks to the 30 h batch processing, 6 h overlaps may be used. To avoid boundary effects, we only consider the central 5 h (21:30–02:30 hours) of these overlaps. Figure 11 shows the RMS values for the overlaps of the RD PSO solutions. The mean of the 3D RMS values is 0.55 cm. These results confirm the good consistency and quality of the orbit determination procedure.

4.3 Comparison of RSO and PSO

The RSO and the PSO are compared to study the consistency of the two products. It has to be emphasized that the low latency solutions are optimized for the quick delivery and not for the best possible result with the involved software packages. As shown by Montenbruck et al. (2008), the orbits from DEOS are at the same level of accuracy as the AIUB solutions when the same input data are used and the same requirements are met on both sides.

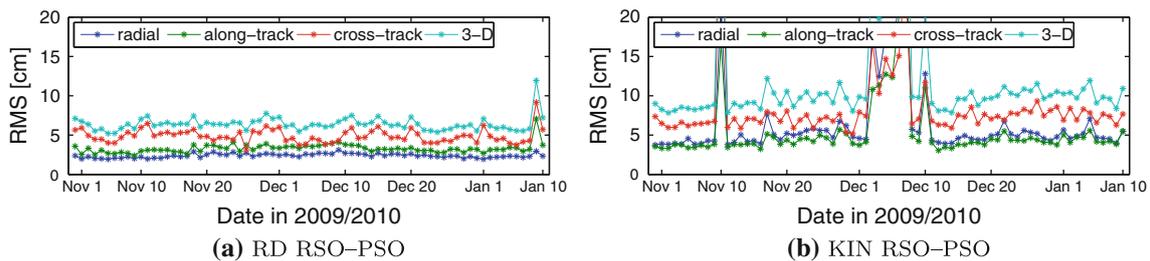


Fig. 12 3D RMS values (cm) for differences between RSO and PSO

Figure 12 shows the 3D RMS values for the differences between the RD orbits (Fig 12a, mean offset: radial -1.22 cm, along-track 0.39 cm, cross-track 2.43 cm) and between the KIN orbits (Fig 12b, 0.24 , 0.04 , 6.37 cm). The differences between the RD RSO and PSO are below 10 cm and the KIN RSO is, except for some days, at the level of 10 cm with respect to the PSO. Outliers in the comparison between the RD RSO and PSO, e.g., on 9 January 2010, are usually due to data gaps. Due to late data dumps, data gaps in the RSO processing may not be present in the PSO. When a data gap is present in both solutions, the propagation during such a gap may also lead to larger differences. The reasons for the reduced quality of the KIN RSO on some days have been already given in Sect. 4.1. The mean cross-track offsets in both comparisons are caused by the cross-track orbit shifts of the PSO due to the empirical PCVs (Bock et al. 2011) used in the PSO but not yet in the RSO processing. The mean radial offset between the RD RSO and the RD PSO of more than 1 cm may be an indication for uncertainties in the antenna offset vectors. The RD RSO is a more dynamic orbit solution than the RD PSO and therefore sensitive to such errors.

Nevertheless, the comparison shows good consistency between the RSO and PSO. The RSO has despite its low latency requirements a very good quality and considering the accuracy of the PSO (see Sect. 5) it can be concluded that the RSO meets the accuracy requirement of 0.5 m with a large margin.

5 Validation with SLR measurements

The International Laser Ranging Service (ILRS, Pearlman et al. 2002) provides SLR measurements to the GOCE satellite. The SLR tracking of the satellite is challenging due to its low altitude resulting in a high velocity and very short passes over the stations (3–4 min). ESA and AIUB (Jäggi et al. 2010) provide predictions to the ILRS community to support well-distributed and regular tracking by the SLR stations.

The SLR measurements are used for an independent validation of the GPS-derived orbits. The importance of this independent validation in the case of GOCE is documented in Bock et al. (2011). The significant improvements due to

the use of the empirical PCVs could be demonstrated with the SLR validation.

The LRR array consists of several reflectors. Therefore, a nadir-dependent correction of the ranges has to be performed. Together with the CoM offsets of the LRR array, these corrections can be found in Bigazzi and Frommknecht (2010). The differences between the SLR measurements and the GPS-derived ranges between the satellite and the SLR tracking stations are shown in Figs. 13 and 14 for the four different orbit types. SLRF2005 (http://ilrs.gsfc.nasa.gov/working_groups/awg/SLRF2005.html) coordinates are used for the SLR stations and residuals larger than 20 cm are removed. The residuals are sorted in ascending (dusk) and descending (dawn) passes, because only these passes occur due to the sun-synchronous orbit of the satellite. The separation between ascending and descending passes is made to identify possible problems in one of the two pass types, which was very helpful in the beginning of the mission. The distribution of passes has been very inhomogeneous during the commissioning phase of the mission (not shown here). Before correcting for the PCVs, the cross-track orbit shift (Bock et al. 2011) showed up with different sign in ascending and descending passes (Jäggi et al. 2010) depending on the azimuth and elevation of the SLR measurement. Table 5 summarizes the statistics of the validation, which no longer shows specific differences between ascending and descending passes. The numbers in Table 5 confirm that the mission requirements for both orbit products are met. The RSO quality is better than 10 cm, which is far below the requirement of 50 cm. The accuracy of the PSO is at the 2 cm level, though a quite large offset of 0.88 cm is still present in the data. Comparisons of the PSO with more dynamical orbits could be very helpful to find the reason for it.

6 Summary and conclusions

GOCE, the first Earth explorer core mission from ESA, is now in orbit since more than 1 year. The orbit generation based on GPS observations from the onboard Lagrange receiver has been established within the GOCE HPF. DEOS and AIUB are delivering the RSO and the PSO, respectively,

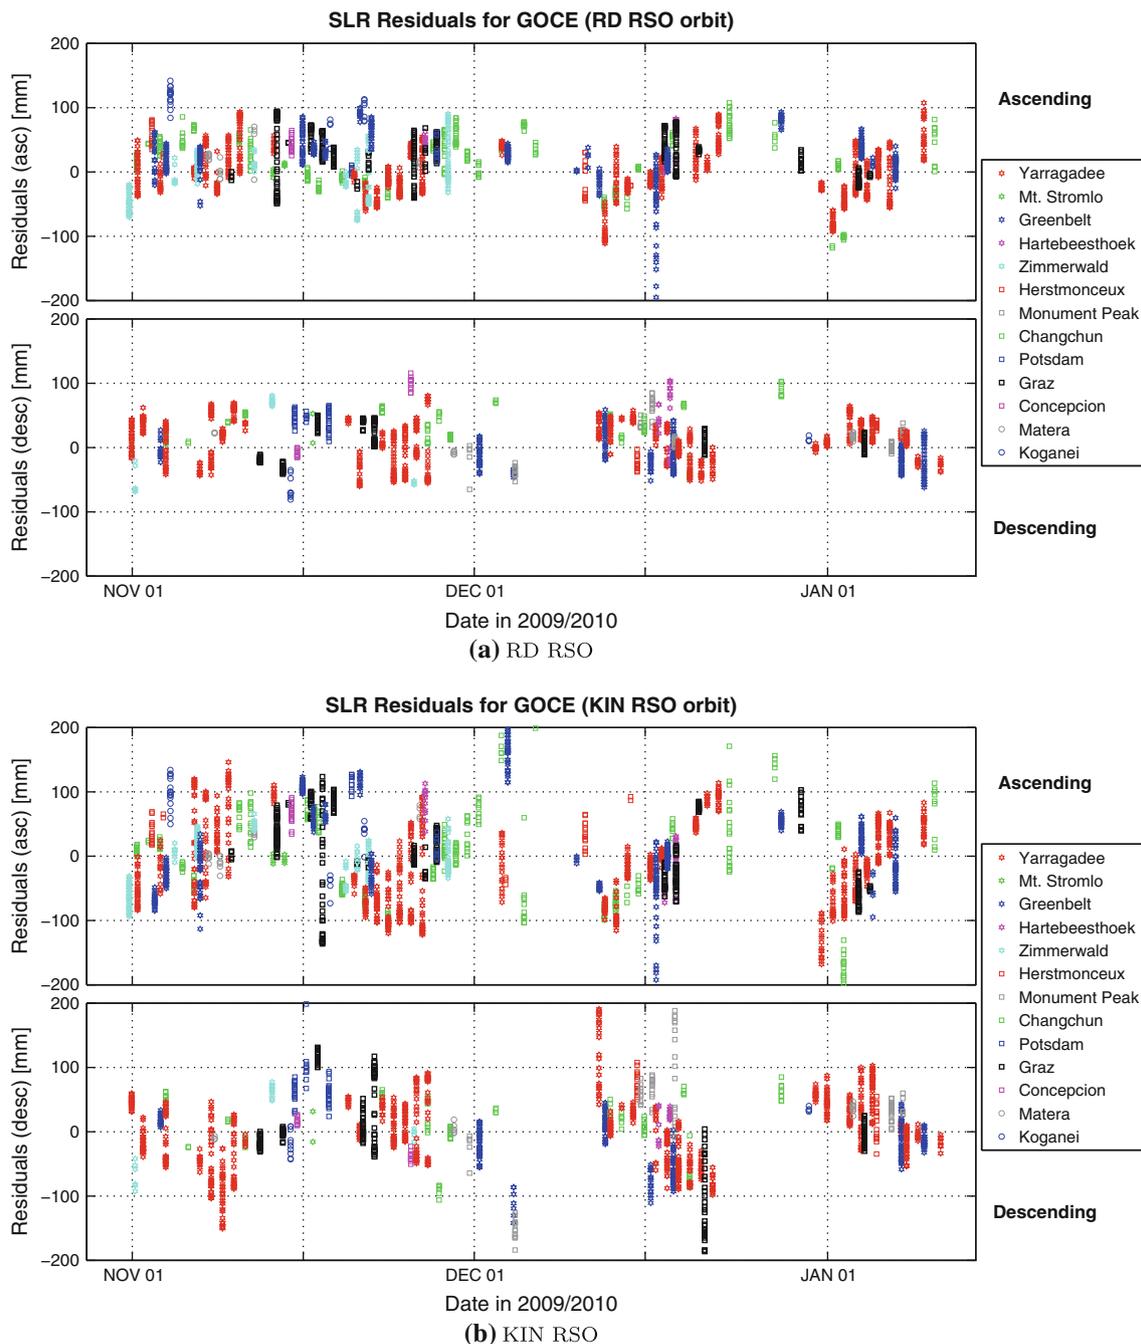


Fig. 13 SLR residuals for RSO

on a routine basis. First orbit results of a 72-day period in 2009 and 2010 were presented here. The almost continuous 1 Hz data availability from the 12-channel space-borne GPS receiver is unique and allows for a time series of KIN positions with only 0.5% of missing epochs.

The RSO and PSO generation procedures were briefly recapitulated and the different characteristics and used mod-

els were summarized. The RSO results show that the low latency (1 day) as well as the accuracy requirements (0.5 m) are easily met. The accuracy was found to be better than 10 cm. The consistency of the RSO and PSO is also at this level. The excellent internal quality of the PSO is underlined by the mean 3D RMS values of the differences between RD and KIN PSO with 1.82 cm and for the overlap

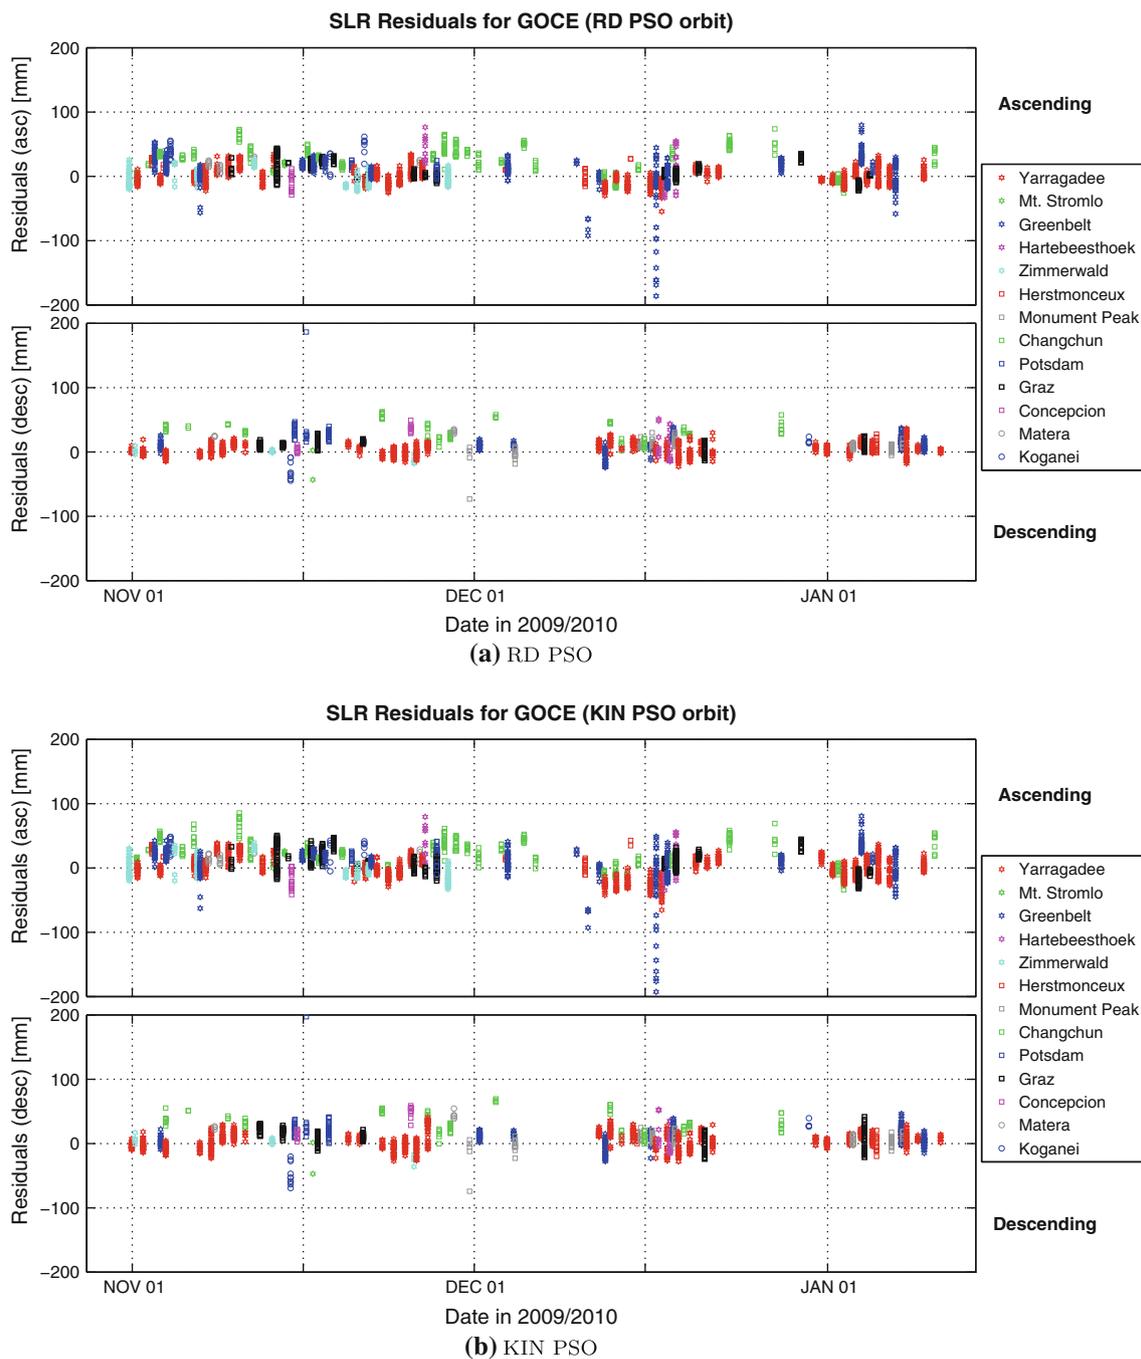


Fig. 14 SLR residuals for PSO

Table 5 Statistics of SLR validation

Orbit	Mean (cm)	RMS (cm)
RSO RD	1.29	4.10
RSO KIN	0.53	7.14
PSO RD	0.88	2.05
PSO KIN	0.88	2.23

analysis of the RD orbits with 0.55 cm. The independent SLR validation states an accuracy at the level of 2 cm for the PSO, which corresponds to the mission requirement.

Acknowledgments The authors acknowledge the European Space Agency for the provision of the GOCE data. Significant parts of the work described in this study were financed through the European Space Agency contract no. 18308/04/NL/MM for the design, development and operation of the GOCE Level 2 data processing system. The contributions of CODE are also gratefully acknowledged. CODE is a joint

venture of AIUB, Swiss Federal Office of Topography (swisstopo), Wabern, Switzerland, the German Federal Office of Cartography and Geodesy (BKG), Frankfurt a. Main, Germany, and the Institut für Astronomische und Physikalische Geodäsie (IAPG), Technische Universität München, Germany.

References

- Altamimi Z, Collilieux X, Legrand J, Garayt B, Boucher C (2007) ITRF2005: a new release of the International Terrestrial Reference Frame based on time series of station positions and Earth Orientation Parameters. *J Geophys Res* 112(B9):401–419. doi:10.1029/2007JB004949
- Bigazzi A, Frommknecht B (2010) Note on GOCE instruments positioning. Issue 3.1. [http://earth.esa.int/download/goce/GOCE-LRR-GPS-positioning-Memo_3.1_\[XGCE-GSEG-EOPG-TN-09-0007v3.1\].pdf](http://earth.esa.int/download/goce/GOCE-LRR-GPS-positioning-Memo_3.1_[XGCE-GSEG-EOPG-TN-09-0007v3.1].pdf)
- Bock H (2004) Efficient methods for determining precise orbits of low Earth orbiters using the Global Positioning System. *Geodätisch-geophysikalische Arbeiten in der Schweiz*, Band 65, Schweizerische Geodätische Kommission, Institut für Geodäsie und Photogrammetrie, Eidg. Technische Hochschule Zürich, Zürich
- Bock H, Jäggi A, Švehla D, Beutler G, Hugentobler U, Visser P (2007) Precise orbit determination for the GOCE satellite using GPS. *Adv Space Res* 39(10):1638–1647. doi:10.1016/j.asr.2007.02.053
- Bock H, Dach R, Jäggi A, Beutler G (2009) High-rate GPS clock corrections from CODE: support of 1 Hz applications. *J Geod* 83(11):1083–1094. doi:10.1007/s00190-009-0326-1
- Bock H, Jäggi A, Meyer U, Dach R, Beutler G (2011) Impact of GPS antenna phase center variations on precise orbits of the GOCE satellite. *Adv Space Res* 47(11):1885–1893. doi:10.1016/j.asr.2011.01.017
- Dach R (2009) Code analysis center down. IGS Mail No. 6033. IGS Central Bureau Information System
- Dach R, Hugentobler U, Fridez P, Meindl M (eds) (2007) Bernese GPS Software Version 5.0. Astronomical Institute, University of Bern, Bern, Switzerland. <http://www.bernese.unibe.ch/docs/DOCU50.pdf>, user manual
- Dach R, Brockmann E, Schaer S, Beutler G, Meindl M, Prange L, Bock H, Jäggi A, Ostini L (2009) GNSS processing at CODE: status report. *J Geod* 83(3–4):353–365. doi:10.1007/s00190-008-0281-2
- Dow JM, Neilan RE, Rizos C (2009) The International GNSS Service in a changing landscape of Global Navigation Satellite Systems. *J Geod* 83(3–4):191–198. doi:10.1007/s00190-008-0300-3
- Drinkwater M, Haagmans R, Muzi D, Popescu A, Floberghagen R, Kern M, Fehrer M (2006) The GOCE gravity mission: ESA's first core explorer. In: *Proceedings of the 3rd GOCE User Workshop*, 6–8 Nov 2006, Frascati, Italy, ESA SP-627, pp 1–7
- ESA (2010a) GOCE Level 2 Product Data Handbook. http://earth.esa.int/pub/ESA_DOC/GOCE/GO-MA-HPF-GS-0110_4.2-ProductDataHandbook.pdf
- ESA (2010b) GOCE Standards. http://earth.esa.int/pub/ESA_DOC/GOCE/GOCE_Standards_3.2.pdf
- Förste C, Flechtner F, Schmidt R, Stubenvoll R, Rothacher M, Kusche J, Neumayer H, Biancale R, Lemoine JM, Barthelmes F, Bruinsma S, König R, Meyer U (2008) EIGEN-GL05C—a new global combined high-resolution GRACE-based gravity field model of the GFZ-GRGS cooperation. *Geophys Res Abstr* 10:EGU2008-A-03426
- Gerlach C, Földváry L, Švehla D, Gruber T, Wermuth M, Sneeuw N, Frommknecht B, Oberndorfer H, Peters T, Rothacher M, Rummel R, Steigenberger P (2003) A CHAMP-only gravity field model from kinematic orbits using the energy integral. *Geophys Res Lett* 30(20):2037. doi:10.1029/2003GL018025
- Gurtner W (1994) RINEX: the receiver-independent exchange format. *GPS World* 5(7):48–52. Format specifications available at <ftp://igsceb.jpl.nasa.gov/igsceb/data/format/rinex2.txt>
- Intelisano A, Mazzini L, Notarantonio A, Landenna S, Zin A, Scaciga L, Marradi L (2008) Recent flight experiences of TAS-I on-board navigation equipments. In: *Proceedings of the 4th ESA workshop on satellite navigation user equipment technologies, NAVITEC'2008*, 10–12 Dec 2008, Noordwijk, The Netherlands
- Jäggi A, Hugentobler U, Beutler G (2006) Pseudo-stochastic orbit modeling techniques for low-Earth orbiters. *J Geod* 80(1):47–60. doi:10.1007/s00190-006-0029-9
- Jäggi A, Hugentobler U, Bock H, Beutler G (2007) Precise orbit determination for GRACE using undifferenced or doubly differenced GPS data. *Adv Space Res* 39(10):1612–1619. doi:10.1016/j.asr.2007.03.012
- Jäggi A, Dach R, Montenbruck O, Hugentobler U, Bock H, Beutler G (2009) Phase center modeling for LEO GPS receiver antennas and its impact on precise orbit determination. *J Geod* 83(12):1145–1162. doi:10.1007/s00190-009-0333-2
- Jäggi A, Bock H, Floberghagen R (2010) GOCE orbit predictions for SLR tracking. *GPS Solut* 15(2):129–137. doi:10.1007/s10291-010-0176-6
- Jäggi A, Bock H, Prange L, Meyer U, Beutler G (2011) GPS-only gravity field recovery using GOCE, CHAMP, or GRACE. *Adv Space Res* 47(6):1020–1028. doi:10.1016/j.asr.2010.11.008
- Koop R, Gruber T, Rummel R (2006) The status of the GOCE high-level processing facility. In: *Proceedings of the 3rd GOCE User Workshop*, 6–8 Nov 2006, Frascati, Italy, ESA SP-627, pp 199–205
- Lyard F, Lefevre F, Letellier T, Francis O (2006) Modelling the global ocean tides: insights from FES2004. *Ocean Dyn* 56:394–415. doi:10.1007/s10236-006-0086-x
- McCarthy DD, Petit G (2004) IERS conventions 2003. IERS technical note no. 32. Bundesamt für Kartographie und Geodäsie, Frankfurt am Main, Germany
- Montenbruck O, van Helleputte T, Kroes R, Gill E (2005) Reduced dynamic orbit determination using GPS code and carrier measurements. *Aerosp Sci Technol* 9(3):261–271. doi:10.1016/j.ast.2005.01.003
- Montenbruck O, Andres Y, Bock H, van Helleputte T, van den IJssel J, Loiselet M, Marquardt C, Silvestrin P, Visser P, Yoon Y (2008) Tracking and orbit determination performance of the GRAS instrument on MetOp-A. *GPS Solut* 12(4):289–299. doi:10.1007/s10291-008-0091-2
- Niell AE (1996) Global mapping functions for the atmosphere delay of radio wavelengths. *J Geophys Res* 101(B2):3227–3246
- Pail R, Bruinsma S, Migliaccio F, Förste C, Goiginger H, Schuh WD, Höck E, Regguzoni M, Brockmann JM, Abrikosov O, Veicherts M, Fecher T, Mayrhofer R, Krasbutter I, Sansò F (2011) First GOCE gravity field models derived by three different approaches. *J Geod*. doi:10.1007/s00190-011-0467-x
- Pavlis D, Poulou S, McCarthy J (2006) GEODYN Operations Manual. Contractor report, SGT Inc., Greenbelt, MD
- Pearlman M, Degnan J, Bosworth J (2002) The International Laser Ranging Service. *Adv Space Res* 30(2):135–143. doi:10.1016/S0273-1177(02)00277-6
- Prange L, Jäggi A, Dach R, Bock H, Beutler G, Mervart L (2010) AIUB-CHAMP02S: the influence of GNSS model changes for gravity field recovery using spaceborne GPS. *Adv Space Res* 45(2):215–224. doi:10.1016/j.asr.2009.09.020
- Reigber C, Lühr H, Schwintzer P (2002) CHAMP mission status. *Adv Space Res* 30(2):129–134. doi:10.1016/S0273-1177(02)00276-4
- Rothacher M, Schmid R (2010) ANTEX: the antenna exchange format, version 1.4. IGS Central Bureau Information System, <ftp://ftp.igs.org/pub/station/general/antex14.txt>

- Rummel R, Balmino G, Johannessen J, Visser P, Woodworth P (2002) Dedicated gravity field missions—principles and aims. *J Geodyn* 33: 3–20. doi:[10.1016/S0264-3707\(01\)00050-3](https://doi.org/10.1016/S0264-3707(01)00050-3)
- Schmid R, Steigenberger P, Gendt G, Ge M, Rothacher M (2007) Generation of a consistent absolute phase center correction model for GPS receiver and satellite antennas. *J Geod* 81(12): 781–798. doi:[10.1007/s00190-007-0148-y](https://doi.org/10.1007/s00190-007-0148-y)
- Standish EM (1998) JPL planetary and lunar ephemerides, DE405/LE405. JPL IOM 312.F-98-048.
- Švehla D, Rothacher M (2005) Kinematic precise orbit determination for gravity field determination. In: Sansò F (ed) *A window on the future of geodesy*, vol 128. Springer, Berlin, pp 181–188. doi:[10.1007/3-540-27432-4_32](https://doi.org/10.1007/3-540-27432-4_32)
- Tapley B, Bettadpur S, Watkins M, Reigber C (2004) The gravity recovery and climate experiment: mission overview and early results. *Geophys Res Lett* 31(9):L09607. doi:[10.1029/2004GL019920](https://doi.org/10.1029/2004GL019920)
- van den IJssel J, Visser P, Rodriguez EP (2003) CHAMP precise orbit determination using GPS data. *Adv Space Res* 31(8):1889–1895. doi:[10.1016/S0273-1177\(03\)00161-3](https://doi.org/10.1016/S0273-1177(03)00161-3)
- van Helleputte T (2004) User manual for the GHOST orbit determination software. Deutsches Zentrum für Luft- und Raumfahrt, Oberpfaffenhofen, fDS-SUM-3110
- Visser P, van den IJssel J, van Helleputte T, Bock H, Jäggi A, Beutler G, Hugentobler U, Švehla D (2006) Rapid and precise orbit determination for the GOCE satellite. In: *Proceedings of the 3rd GOCE user workshop*, 6–8 Nov 2006, Frascati, Italy, ESA SP-627, pp 235–239
- Visser P, van den IJssel J, van Helleputte T, Bock H, Jäggi A, Beutler G, Švehla D, Hugentobler U, Heinze M (2009) Orbit determination for the GOCE satellite. *Adv Space Res* 43(5): 760–768. doi:[10.1016/j.asr.2008.09.016](https://doi.org/10.1016/j.asr.2008.09.016)
- Zumberge JF, Heflin MB, Jefferson DC, Watkins MM, Webb FH (1997) Precise point positioning for the efficient and robust analysis of GPS data from large networks. *J Geophys Res* 102(B3): 5005–5017. doi:[10.1029/96JB03860](https://doi.org/10.1029/96JB03860)